



DUROWOOD

www.durowood.com

EUROTECH CLADDING SERIES












European co-extrusion exterior cladding style

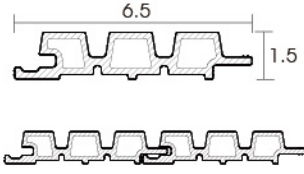DUROWOOD wall cladding is the perfect solution for exterior walls because it combines the toughness and longevity of a capped wood plastic composite with an engineered design. The shield gives the wall cladding unbeatable colors and textures, with highly stain & UV resistance, making it long lasting and ultra low maintenance.




Co-extrusion wall cladding

Model	Profil	Color	Dimensions
DW3021		 Charcoal Black	6.5X1.5inch (165X33mm)
		 Silver Grey	
		 Brazil Ipe	
		 Teak	
		 Biscayne	
		 Elite White	
		 Oak	
		 Maple	




Fasteners



Model	Profil	Description	Dimensions	Number of ft ²
M-D0.16X1.3		Countersunk head self-drilling and self tapping screw	D0.16X1.3inch (4.2X32mm)	2

Corner Trims

Model	Profil	Color	Dimensions
DW3023		Match With Wall Cladding	2X2inch (50X50mm)


Corner Trims

Model	Profil	Color	Dimensions
DW3042		Match With Wall Cladding	2X2inch (50.7X50mm)
DW3043			2.3X2.1inch (58.6X55.5mm)
DW3044			2.8X2.6inch (71.1X67.5mm)

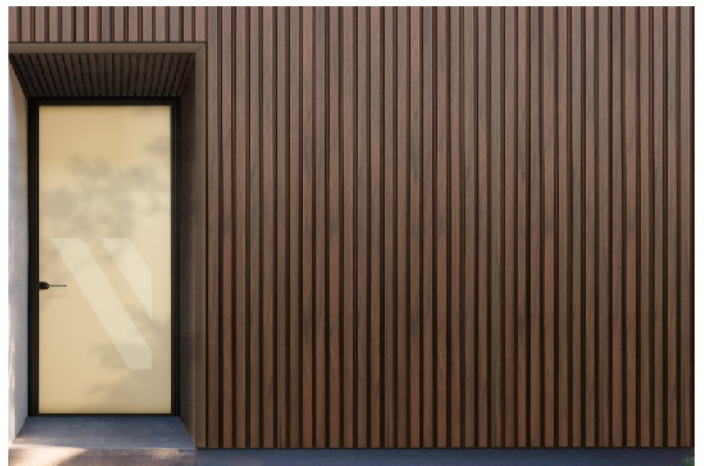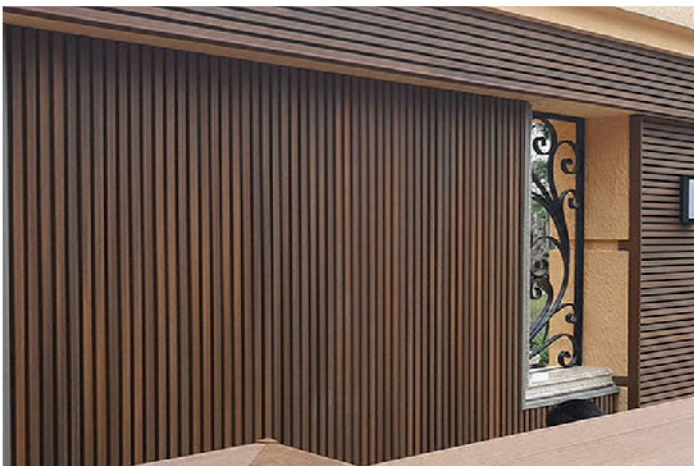


Joist Installation

Please consult a professional building professional to design and choose the correct drainage and ventilation duct materials and design layout. The thickness of the keel is at least 1 inch, so that there is sufficient open and dry space between the wallboard and the wall not blocked by the ventilation ducts. The wall of the construction must be horizontal and the center distance between the keels cannot exceed 19.6 inch (500mm).

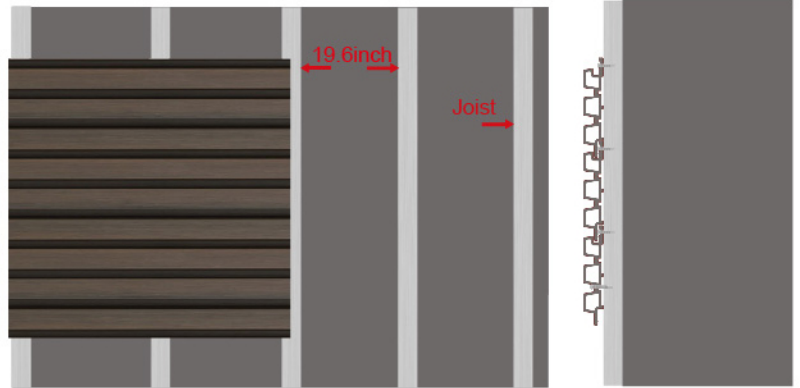


Horizontal Installation

Wall cladding installation

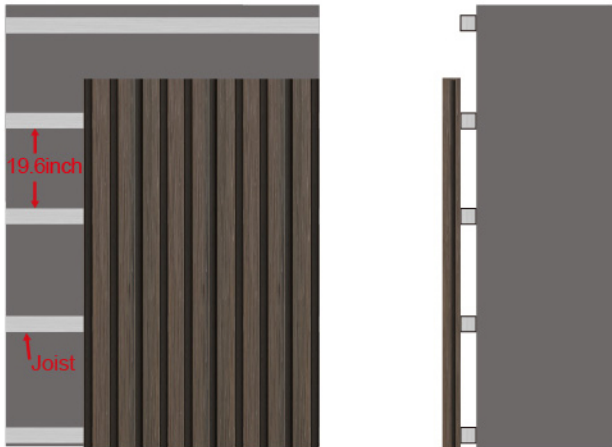


Vertical Installation

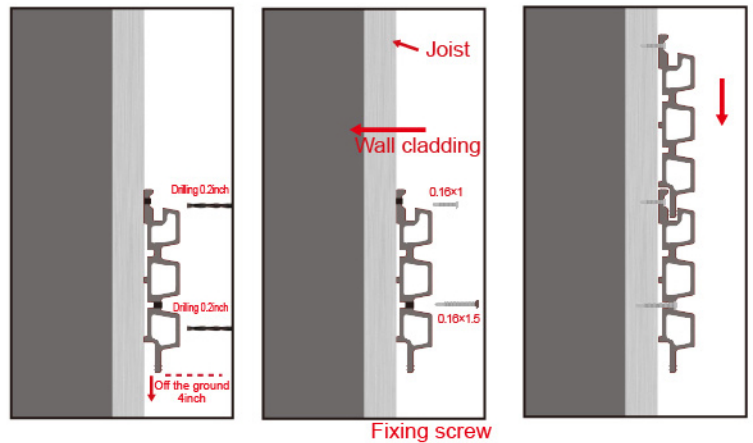


Fixing screw




Horizontal Installation details

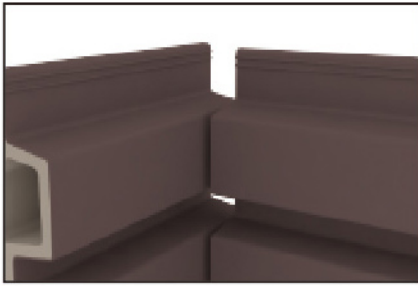

Inside Corner

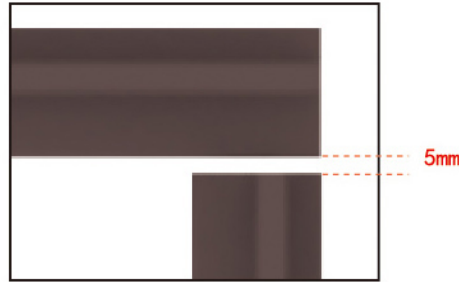


5mm

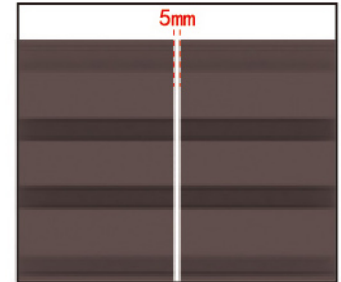


5mm

Junction

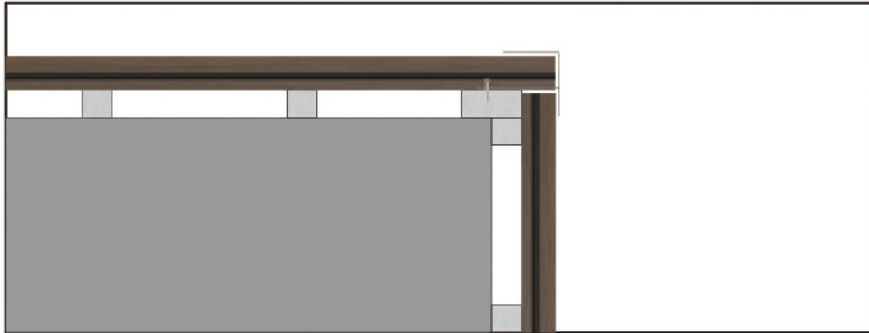


Outside Corner




Side


Vertical Installation details

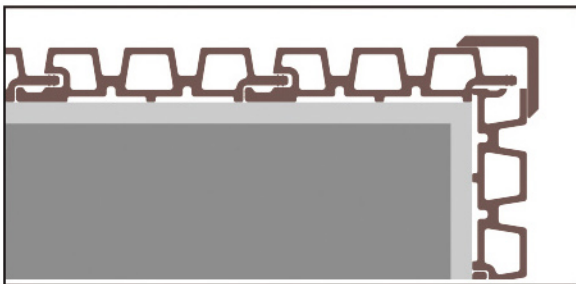


Outside Corner-Option 1

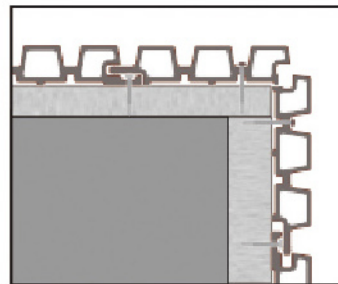


Outside Corner-Option 2

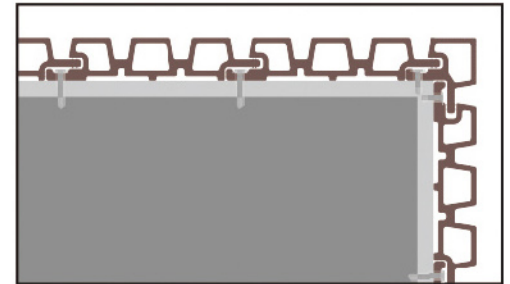


Outside Corner-Option 3

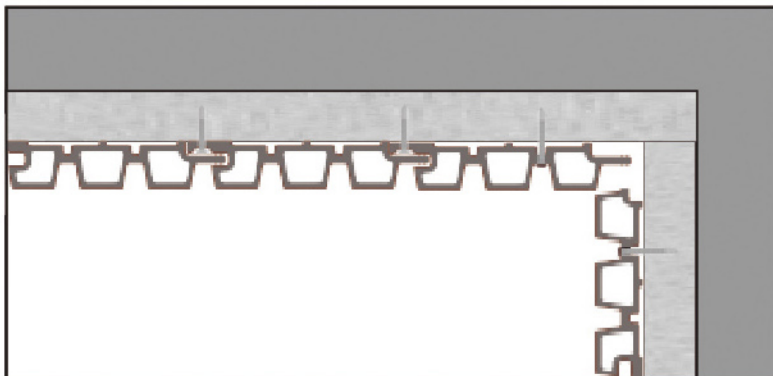


Inside Corner-Option 1

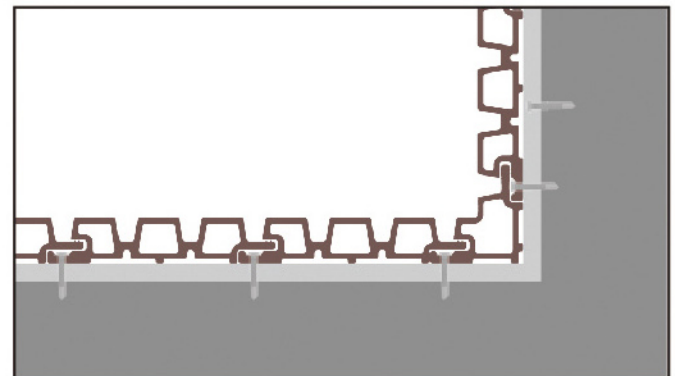

Inside Corner-Option 2

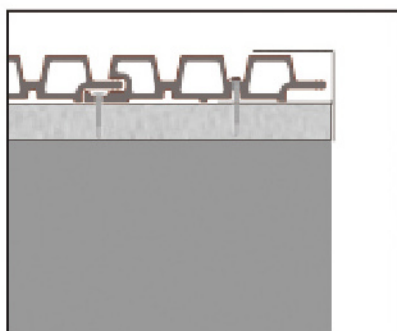

Side-Option 1

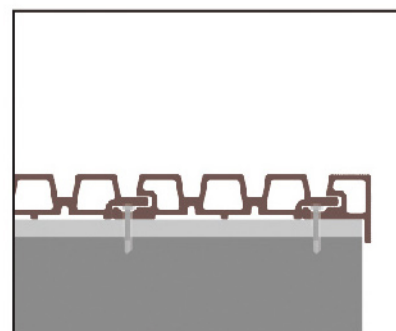

Side-Option 2



DUROWOOD wall cladding is the perfect solution for exterior walls because it combines the toughness and longevity of a capped wood plastic composite with an engineered design. The shield gives the wall cladding unbeatable colors and textures, with highly stain & UV resistance, making it long lasting and ultra low maintenance.



Charcoal Black



Silver Grey




Brazil Ipe



Teak



Biscayne

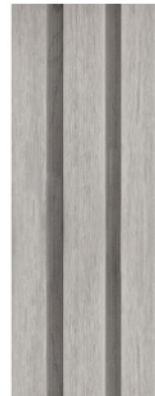

Elite White



Oak



Maple

DUROWOOD
www.durowood.com